




框式搅拌器 JBK Frame Type Mixer

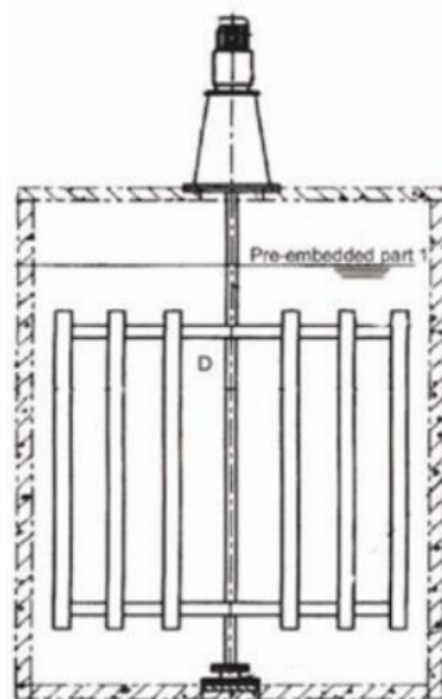

JBK型框式搅拌机
JBK Frame Type Mixer

用途 Usage

框式搅拌机用于给水厂、污水处理厂等场所投加药剂的溶解搅拌。
The frame type mixer is used for agitating the solution of the dosage in water plant, sewage treatment plant and so on.



型号表示方法 Type code



主要技术参数及安装尺寸


Main Technical Parameters and Installation Dimensions

型号 Model	叶轮直径 (mm) Diameter	转速 (r/min) Rotate speed	功率 (kW) Motor power	服务范围 (m) Service scope
JBK500	500	7-45	0.18-1.1	1.0×1.0
JBK1000	1000	4-23	0.25-1.5	1.5×1.5
JBK1500	1500	2.5-15	0.25-1.5	2.0×2.0
JBK2000	2000	2-11	0.37-1.5	2.5×2.5
JBK2500	2500	1.5-9	0.37-1.5	3.0×3.0
JBK3000	3000	1.2-7.5	0.37-2.2	3.5×3.5
JBK3500	3500	1-6.5	0.55-2.2	4.0×4.0
JBK4000	4000	1-6	0.55-2.2	4.5×4.5
JBK4500	4500	1-5.0	0.55-2.2	5.0×5.0
JBK5000	5000	1-4.5	0.75-3.0	5.5×5.5
JBK5500	5500	1-4.0	0.75-3.0	6.0×6.0
JBK6000	6000	1-3.5	1.1-3.0	6.5×6.5
JBK6500	6500	1-3.5	1.1-3.0	7.0×7.0
JBK7000	7000	1-3.0	1.5-4.0	7.5×7.5
JBK7500	7500	1-3.0	1.5-4.0	8.0×8.0

注：可根据用户要求作特殊设计
Note: Special design can be made according to user's requirments.

JBK型框式搅拌机外形安装图



Outside Installation Drawing for JBK Frame Type Mixer

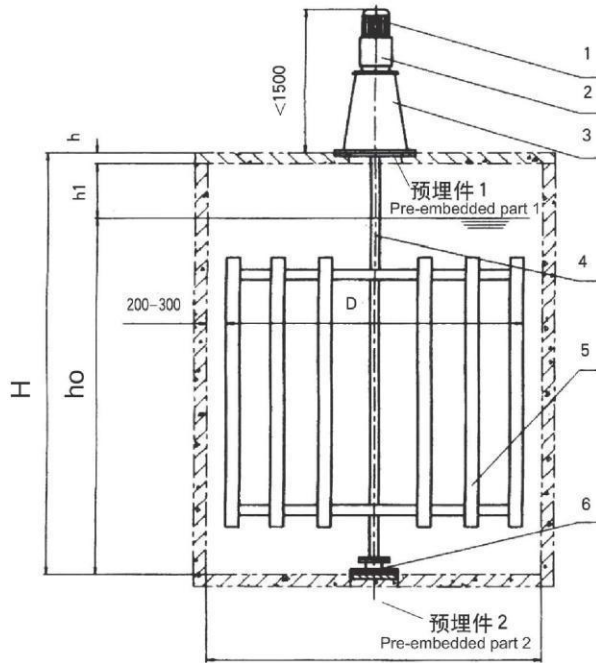

1、单层全高桨板


1. Single-layer, full-height paddle board

- 1、电机 2、减速机 3、支座
4、搅拌轴 5、桨板 6、水下支座
1. Motor 2. Speed reducer
3. Supporting base 4. Mixing shaft
5. Paddle board 6. Underwater supporting base

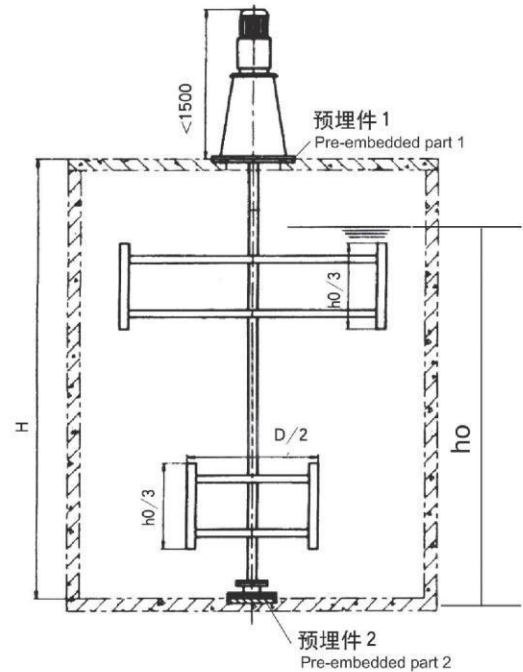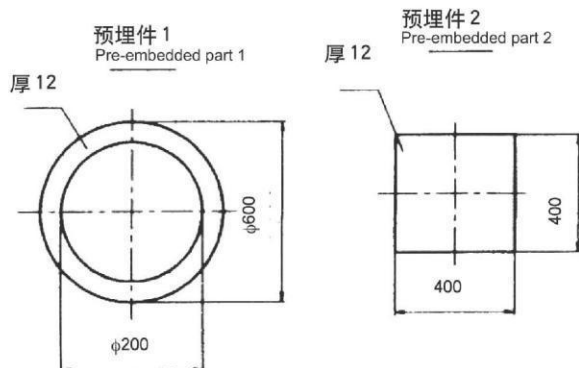

2、双层全高桨板

2. Double-layer, full-height paddle board

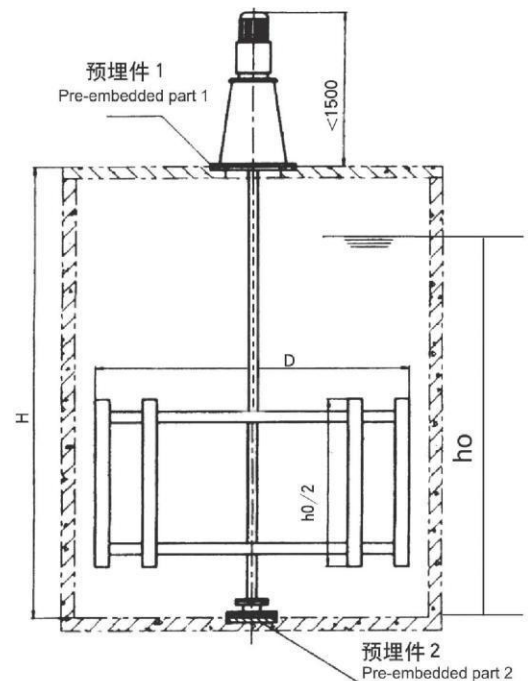

3、单层半高桨板

3. Single-layer, half-height paddle board



地址：南京六合经济开发区时代大道 69 号
Add: No.69 Shidai Avenue, Luhe Economic Development
Zone, Nanjing, P.R.China
电话 Tel: +86 25 57139086 86661665 57138396(总机)
传真 Fax: +86 25 57139096 86669839
[http:www.njbeite.com](http://www.njbeite.com)
E-mail:Beite@njbeite.com